


# PRODUCT CATALOGUE



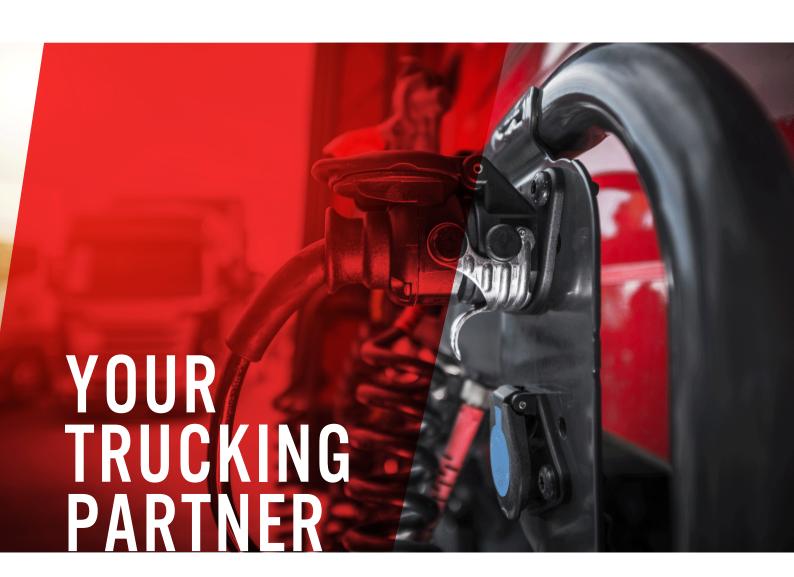

WWW.SUPREMETRUCK.CO.NZ

# **TABLE OF CONTENTS**

SECTION DESCRIPTION	PAGE
SECTION 1: ELECTRICAL SUZI'S	1-8
SECTION 2: ANTI-KINK AIR COILS	9-12
SECTION 3: EBS COILS	13-15
SECTION 4: BATTERY CHARGING PRODUCTS	16-19
SECTION 5: PLUGS	20-23
SECTION 6: SOCKETS	24-27
SECTION 7: SPECIALIST PRODUCTS	28-30
SECTION 8: ACCESSORIES	31-34
SECTION 9: KITS	35







SHORT TAIL POLY-U SUZI WITH MOULDED PLUGS

- POLYURETHANE COIL
- 2 X MOULDED DIN PLUGS
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- WORKING LENGTH = 3.6M



# SHORT TAIL POLY-U SUZI WITH MOULDED PLUGS

- POLYURETHANE COIL
- 1 X MOULDED DIN PLUG
- 1 X MOULDED SAE/EURO PLUG
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- WORKING LENGTH = 3.6M
- ADAPTS FROM 7PIN SAE/EURO (E.G. SCANIA, VOLVO, MERCEDES, MAN, IVECO, DAF) TO 7PIN DIN
- NOTE: NOT COMPATIBLE FOR TRAILERS WITH REVERSE FUNCTION



# SHORT TAIL POLY-U ADAPTER COIL WITH REVERSE FUNCTION



- **POLYURETHANE COIL**
- 1 X MOULDED DIN PLUG WITH REVERSE FUNCTION
- 1 X MOULDED HEAVY DUTY PLUG WIRED TO AS4735
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- WORKING LENGTH = 3.6M
- ADAPTS FROM EURO PRIME MOVER TO AUSTRALIAN TRAILER WITH REVERSE FUNCTION (7PIN EURO (E.G. SCANIA, VOLVO, MERCEDES, MAN, IVECO, DAF) TO 7PIN DIN
- SUITABLE FOR TRAILERS WITH REVERSE FUNCTION







0-206 SHORT TAIL POLY-U SUZI WITH MOULDED SAE/EURO PLUGS

- POLYURETHANE COIL
- 2 X SAE/EURO MOULDED PLUGS
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- WORKING LENGTH = 3.6M
- COMPLIES WITH NEW ADR 42/05 (AS4735 / IS01185 / SAE J560)



SHORT TAIL POLY-U SUZI WITH MOULDED PLUG (SINGLE END)

- POLYURETHANE COIL
- 1 X MOULDED DIN PLUG
- 1 X BARE END FOR HARD-WIRING APPLICATIONS
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- WORKING LENGTH = 3.6M



# LONG TAIL POLY-U SUZI WITH MOULDED PLUGS

- POLYURETHANE COIL
- 2 X MOULDED DIN PLUGS
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- 1M LONG TAIL FOR EXTENDED REACH
- WORKING LENGTH = 4.6M







# LONG TAIL POLY-U ADAPTER COIL (SAE/EURO TO DIN)

- POLYURETHANE COIL
- 1 X MOULDED DIN PLUG
- 1 X MOULDED SAE/EURO PLUG
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- 1M LONG TAIL FOR EXTENDED REACH
- WORKING LENGTH = 4.6M
- ADAPTS FROM 7PIN SAE/EURO (E.G. SCANIA, VOLVO.

MERCEDES, MAN, IVECO, DAF) TO 7PIN DIN

 NOTE: NOT COMPATIBLE FOR TRAILERS WITH REVERSE FUNCTION

#### PART# 100-505-AS



# LONG TAIL POLY-U ADAPTER COIL WITH REVERSE FUNCTION (AS4735 TO AS2513)

- POLYURETHANE COIL
- 1 X MOULDED DIN PLUG WITH REVERSE FUNCTION
- 1 X MOULDED HEAVY DUTY PLUG WIRED TO AS4735
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- 1M LONG TAIL FOR EXTENDED REACH
- WORKING LENGTH = 4.6M
- ADAPTS FROM EURO PRIME MOVER TO AUSTRALIAN TRAILER WITH REVERSE FUNCTION (7PIN SAE/EURO (E.G. SCANIA, VOLVO, MERCEDES, MAN, IVECO, DAF) TO 7PIN DIN
- SUITABLE FOR TRAILERS WITH REVERSE FUNCTION









# LONG TAIL POLY-U SUZI WITH MOULDED SAE/EURO PLUGS

- POLYURETHANE COIL
- 2 X MOULDED SAE/EURO PLUGS
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- 1M LONG TAIL FOR EXTENDED REACH
- WORKING LENGTH = 4.6M
- COMPLIES WITH NEW ADR 42/05 (AS4735 / ISO1185 / SAE J560)



# SHORT TAIL POLY-U SUZI WITH MOULDED PLUG (SINGLE END)



- 1 X MOULDED DIN PLUG
- 1 X BARE END FOR HARD-WIRING APPLICATIONS
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- 1M LONG TAIL FOR EXTENDED REACH
- WORKING LENGTH = 4.6M



# SHORT TAIL SUPPLEMENTARY POLY-U SUZI WITH MOULDED WHITE PLUGS (INVERTED PIN)

- POLYURETHANE COIL
- 2 X SAE/EURO WHITE SUPPLEMENTARY MOULDED PLUGS WITH INVERTED PIN
- COMPLIES WITH ISO 3731
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- WORKING LENGTH = 3.6M







### LONG TAIL SUPPLEMENTARY POLY-U SUZI WITH MOULDED WHITE PLUGS (INVERTED PIN)

- POLYURETHANE COIL
- 2 X SAE/EURO WHITE SUPPLEMENTARY MOULDED PLUGS WITH INVERTED PIN
- COMPLIES WITH ISO 3731
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- 1M LONG TAIL FOR EXTENDED REACH
- WORKING LENGTH = 4.6M



# HEAVY DUTY SHORT TAIL POLY-U SUZI WITH PLASTIC EURO PLUGS

- POLYURETHANE COIL
- 2 X PLASTIC SAE/EURO PLUGS
- WIRE SIZES: 6 X 4MM<sup>2</sup> + 1 X 6MM<sup>2</sup>
- WORKING LENGTH = 3.6M
- ROAD TRAIN SPEC
- COMPLIES WITH NEW ADR 42/05 (AS4735 / IS01185 / SAE J560)



PART# 110-206M

# HEAVY DUTY SHORT TAIL POLY-U SUZI WITH METAL EURO PLUGS

- POLYURETHANE COIL
- 2 X METAL SAE/EURO PLUGS
- WIRE SIZES: 6 X 4MM<sup>2</sup> + 1 X 6MM<sup>2</sup>
- WORKING LENGTH = 3.6M
- ROAD TRAIN SPEC
- COMPLIES WITH NEW ADR 42/05 (AS4735 / ISO1185 / SAE J560)









# HEAVY DUTY LONG TAIL POLY-U SUZI WITH PLASTIC EURO PLUGS

- POLYURETHANE COIL
- 2 X PLASTIC SAE/EURO PLUGS
- WIRE SIZES: 6 X 4MM<sup>2</sup> + 1 X 6MM<sup>2</sup>
- 1M LONG TAIL FOR EXTENDED REACH
- WORKING LENGTH = 4.6M
- ROAD TRAIN SPEC HEAVY DUTY CABLE
- COMPLIES WITH NEW ADR 42/05 (AS4735 / IS01185 / SAE J560)

#### PART# 110-506M



# HEAVY DUTY LONG TAIL POLY-U SUZI WITH METAL EURO PLUGS

- POLYURETHANE COIL
- 2 X METAL SAE/EURO PLUGS
- WIRE SIZES: 6 X 4MM<sup>2</sup> + 1 X 6MM<sup>2</sup>
- 1M LONG TAIL FOR EXTENDED REACH
- WORKING LENGTH = 4.6M
- ROAD TRAIN SPEC HEAVY DUTY CABLE
- COMPLIES WITH NEW ADR 42/05 (AS4735 / IS01185 / SAE J560)



#### PART# 100-803

### SHORT TAIL 15PIN POLY-U POWERCOIL



- POLYURETHANE 15CORE COIL
- 2 X 15PIN PLUGS
- WIRE SIZES: 12 X 1.5MM<sup>2</sup> + 3 X 2.5MM<sup>2</sup>
- WORKING LENGTH = 3.6M
- 15 FUNCTIONS
- NOT SUITABLE FOR EBS APPLICATIONS



### LONG TAIL 15PIN POLY-U POWERCOIL



- POLYURETHANE 15CORE COIL
- 2 X 15PIN PLUGS
- WIRE SIZES: 12 X 1.5MM<sup>2</sup> + 3 X 2.5MM<sup>2</sup>
- 1M LONG TAIL FOR EXTENDED REACH
- WORKING LENGTH = 4.6M
- 15 FUNCTIONS
- NOT SUITABLE FOR EBS APPLICATIONS





### **15PIN TO 7PIN ADAPTER SUZI**

- POLYURETHANE COIL
- 1 X MOULDED DIN PLUG
- 1 X 15PIN PLUG (1-7 ONLY)
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- WORKING LENGTH = 3.6M
- ADAPTS FROM EURO 15PIN (MERCEDES, VOLVO ETC.)
  TO 7PIN DIN








#### MINI COIL WITH TWO MOULDED PLUGS



- POLYURETHANE COIL
- 2 X MOULDED DIN PLUGS
- WIRE SIZES: 6 X 1.0MM<sup>2</sup> + 1 X 1.5MM<sup>2</sup>
- WORKING LENGTH = ±1.7M
- LIGHT DUTY/RECREATIONAL APPLICATIONS



# SHORT TAIL POLY-U SUZI WITH MOULDED PLUGS STRAIGHT ELECTRICAL CABLE



- SIKAIGHI ELEGIKIGAL GADLE
- 2 X MOULDED DIN PLUG
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- FOR USE AS STRAIGHT ELECTRICAL CABLE, ALONG DRAWBAR/ A-FRAME OR BETWEEN TWO TRAILERS

#### **AVAILABLE IN THE FOLLOWING LENGTHS:**

- 1.2METERS (100-203-STR-1.2M)
- 3METERS (100-203-STR-3M)
- 6METERS (100-203-STR-6M)



# STRAIGHT ELECTRICAL CABLE WITH 2 X MOULDED SAE PLUGS



- STRAIGHT ELECTRICAL CABLE
- 2 X MOULDED SAE PLUG
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- FOR USE AS STRAIGHT ELECTRICAL CABLE, ALONG DRAWBAR/ A-FRAME OR BETWEEN TWO TRAILERS

#### **AVAILABLE IN THE FOLLOWING LENGTHS:**

- 1.2METERS (100-206-STR-1.2M)
- 3METERS (100-206-STR-3M)
- 6METERS (100-206-STR-6M)








# SHORT TAIL HIGH PERFORMANCE POLY-U AIR COIL PAIR

- TUBE SIZE: 12MM OD X 7.6MM ID
- HALF INCH BSPT FITTINGS WITH SPRING GUARDS
- TEMPERATURE RANGE -40°C TO 75°C
- 3.6M WORKING LENGTH
- AVAILABLE WITH 1/4" BSPT FITTINGS ON REQUEST
- NOW ALSO AVAILABLE IN YELLOW OR BLACK FOR AUXILIARY AIR SUPPLY
- 200-103-YEL



# LONG TAIL HIGH PERFORMANCE POLY-U AIR COIL PAIR

- TUBE SIZE: 12MM OD X 7.6MM ID
- HALF INCH BSPT FITTINGS WITH SPRING GUARDS
- TEMPERATURE RANGE -40°C TO 75°C
- 1M LONG TAIL FOR EXTENDED REACH
- 4.6M WORKING LENGTH
- AVAILABLE WITH 1/4" BSPT FITTINGS ON REQUEST
- NOW ALSO AVAILABLE IN YELLOW OR BLACK FOR AUXILIARY AIR SUPPLY
- 200-203-YEL
- 200-203-BLK




#### SHORT REACH POLY-U AIR COIL PAIR

- SHORT REACH FOR APPLICATIONS WITH REDUCED SWING - IDEAL FOR UNDERSLUNG USE BEHIND 5TH WHEEL
- TUBE SIZE: 12MM OD X 7.6MM ID
- HALF INCH BSPT FITTINGS WITH SPRING GUARDS
- TEMPERATURE RANGE -40°C TO 75°C
- AVAILABLE WITH 1/4" BSPT FITTINGS ON REQUEST
- NOW ALSO AVAILABLE IN YELLOW OR BLACK FOR AUXILIARY AIR SUPPLY
- 200-003-YEL
- 200-003-BLK








#### EXTRA LONG REACH POLY-U AIR COIL PAIR

- EXTRA LONG COILED AIR TUBE WITH 2 X SHORT TAILS
- FOR USE ON LONG REACH APPLICATIONS, SUCH AS EXTENDABLE SKELLS
- TUBE SIZE: 12MM OD X 7.6MM ID
- TEMPERATURE RANGE -40°C TO 75°C
- OPTIONAL FITTINGS: 1/2" OR 1/4" BSPT FITTINGS WITH SPRING GUARDS
- 200-FTG-1/2" OR - 200-FTG-1/4"
- 200114



# STRAIGHT POLY-U AIR TUBE - RED, BLUE, BLACK OR YELLOW

- CUSTOMISABLE LENGTHS
- TUBE SIZE: 12MM OD X 7.6MM ID
- CAN BE CUT TO LENGTH WITH 1/2" OR 1/4" BSPT FITTINGS + SPRING GUARDS
- TEMPERATURE RANGE -40°C TO 75°C
- OPTIONAL FITTINGS: 1/2" OR 1/4" BSPT FITTINGS WITH SPRING GUARDS



### PNEUMATIC ACCESSORIES

- HIGH QUALITY PNEUMATIC ACCESSORIES
- MALE AND FEMALE
- SEALING AND NON-SEALING
- 1/2 INCH, 3/8 INCH OR 1/4 INCH
- CA93 CROSS REFERENCE AVAILABLE







### **AIR FITTING KIT - 1/2 INCH**

HIGH QUALITY COMPRESSION END FITTINGS **DESIGNED SPECIFICALLY TO MATCH** TRAIL-LINK HI-PERFORMANCE POLY-U AIR TUBE

- COMPLETE FITTING INCLUDES:
- SPRING GUARD PROTECTOR IN STAINLESS STEEL
- BACK NUT IN STAINLESS STEEL
- OLIVE AND INSERT IN BRASS
- FRONT END 1/2" FITTING
  ONCE TIGHTENED TO SEAL ON THE TUBE, COMPRESSION FITTINGS MUST NEVER BE

#### PART# 200-1/2"TAP.FF.B/R

### 1/2" FEMALE AIR TAPS (BALL VALVE)



- 1/2" FEMALE THREAD T-BALL VALVE SEALING **AIR TAP**
- FOR USE WITH M18 ADAPTER FOR **MERCEDES-BENS OR ANY** 1/2" MALE THREAD
- **AGA GAS APPROVED**
- TAP CONFIGURATIONS VARY. PLEASE CONTACT US.

#### PART# 200-1/2"TAP-MF

# 1/2" MALE TO 1/2" FEMALE ADAPTER TAP

- 1/2" MALE THREAD TO 1/2" FEMALE THREAD 5-BALL VALVE SEALING AIR TAP
- FOR USE ON VEHICLES WITH 1/2" FEMALE **CONNECTIONS (E.G. VOLVO)**
- AGA GAS APPROVED
- TAP CONFIGURATIONS VARY. PLEASE CONTACT US.









# M18 FEMALE TO 1/2 INCH MALE SWIVEL ADAPTER PIN

- POLYURETHANE COIL
- 2 X SAE/EURO WHITE SUPPLEMENTARY MOULDED PLUGS WITH INVERTED PIN
- COMPLIES WITH ISO 3731
- WIRE SIZES: 6 X 1.5MM<sup>2</sup> + 1 X 2.5MM<sup>2</sup>
- WORKING LENGTH = 3.6M

#### PART# 200-M20-1/2"



# M20 FEMALE TO 1/2 INCH MALE SWIVEL ADAPTER

- M18 FEMALE THREAD WITH SEALING O-RING IN SWIVEL NUT TO 1/2" MALE BSPT THREAD
- ADAPTS M18 MALE THREAD STANDPIPE TO 1/2" AIR TAPS (SEE 200-1/2"TAP-FF)
  - COMPATIBLE WITH MERCEDES-BENZ

#### PART# 200-1/2"-FF



### 1/2 INCH UNION FITTING

- 1/2" FEMALE UNION JOINS 1/2" MALE THREAD STANDPIPE WITH 1/2" MALE END FITTING ON TRAIL-LINK POLY-U COILS
- FOR USE WHERE NO TAP IS REQUIRED



# **SECTION 3: EBS COILS**







### SHORT TAIL EBS BRAKING COIL (24VOLT)

- POLYURETHANE COIL
- 2 X 7PIN EBS PLUGS (24VOLT)
- WIRE SIZES: 5 X 1.5MM<sup>2</sup> + 2 X 6MM<sup>2</sup>
- INCLUDES 2 X CAN DATA LINES (TWISTED PAIR)
- FOR USE ON 24 VOLT APPLICATIONS
- SUITABLE FOR ABS AND EBS USE



### LONG TAIL EBS Braking Coil (24Volt))

- POLYURETHANE COIL
- 2 X 7PIN EBS PLUGS (24VOLT)
- WIRE SIZES: 5 X 1.5MM2
- + 2 X 6MM2
- INCLUDES 2 X CAN DATA LINES (TWISTED PAIR)
- 1M LONG TAIL FOR EXTENDED REACH
- FOR USE ON 24 VOLT APPLICATIONS
- SUITABLE FOR ABS AND EBS USE





### SHORT TAIL EBS Braking coil (12Volt)

- POLYURETHANE COIL
- 2 X 7PIN EBS PLUGS (12VOLT)
- WIRE SIZES: 5 X 1.5MM<sup>2</sup> + 2 X 6MM<sup>2</sup>
- INCLUDES 2 X CAN DATA LINES (TWISTED PAIR)
- FOR USE ON 12 VOLT APPLICATIONS
- SUITABLE FOR ABS AND EBS USE



# **SECTION 3: EBS COILS**



#### PART# 100-903V12LT

### LONG TAIL EBS BRAKING COIL (12VOLT)



- POLYURETHANE COIL
- 2 X 7PIN EBS PLUGS (12VOLT)
- WIRE SIZES: 5 X 1.5MM<sup>2</sup> + 2 X 6MM<sup>2</sup>
- INCLUDES 2 X CAN DATA LINES (TWISTED PAIR)
- 1M LONG TAIL FOR EXTENDED REACH
- FOR USE ON 12 VOLT APPLICATIONS
- SUITABLE FOR ABS AND EBS USE

#### PART# 100-913



# SHORT TAIL EBS BRAKING COIL (MULTIVOLT)

- POLYURETHANE COIL
- 2 X 7PIN EBS PLUGS (MULTIVOLT)
- WIRE SIZES: 5 X 1.5MM<sup>2</sup> + 2 X 6MM<sup>2</sup>
- INCLUDES 2 X CAN DATA LINES (TWISTED PAIR)
- FOR USE ON 12 VOLT OR 24 VOLT APPLICATIONS
- SUITABLE FOR ABS AND EBS USE

#### PART# 100-913LT



# LONG TAIL EBS BRAKING COIL (MULTIVOLT)

- POLYURETHANE COIL
- 2 X 7PIN EBS PLUGS (MULTIVOLT)
- WIRE SIZES: 5 X 1.5MM<sup>2</sup> + 2 X 6MM<sup>2</sup>
- INCLUDES 2 X CAN DATA LINES (TWISTED PAIR)
- 1M LONG TAIL FOR EXTENDED REACH
- FOR USE ON 12 VOLT OR 24 VOLT APPLICATIONS
- SUITABLE FOR ABS AND EBS USE



# **SECTION 3: EBS COILS**





### MULTIVOLT (12V/24V) EBS CABLE STRAIGHT

- STRAIGHT CABLE FOR EBS
- PVC JACKET
- WIRE SIZES: 5 X 1.5MM<sup>2</sup> + 2 X 6MM<sup>2</sup>
- INCLUDES 2 X CAN DATA LINES (TWISTED PAIR)
- FOR USE ON 12 VOLT OR 24 VOLT APPLICATIONS









### TAILGATE/BATTERY CHARGER COIL (BARE ENDS)

- 2 POLE BONDED CABLE
- **NOMINAL WIRE SIZES: 2 X 21MM2**
- **RED = POSITIVE; BLACK = NEGATIVE**
- NOMINAL AMP RATING = 200A INTERMITTENT / 110A CONTINUOUS
- 4.6M WORKING LENGTH LOOSENED OR SEPARATED





# LONG TAIL TAILGATE/BATTERY CHARGER COIL (BARE ENDS)

- 2 POLE BONDED CABLE
- NOMINAL WIRE SIZES: 2 X 21MM2
- RED = POSITIVE; BLACK = NEGATIVE
- NOMINAL AMP RATING = 200A INTERMITTENT / 110A CONTINUOUS
- 1M LONG TAIL FOR EXTENDED REACH
- 5.2M WORKING LENGTH





# TAILGATE/BATTERY CHARGER COIL WITH 2 POLE PLUGS

- **2 POLE BONDED CABLE**
- 2 X 2 POLE PLUGS FITTED
- **NOMINAL WIRE SIZES: 2 X 21MM2**
- **RED = POSITIVE; BLACK = NEGATIVE**
- NOMINAL AMP RATING = 200A INTERMITTENT / 110A CONTINUOUS (VOLTAGE DEPENDENT)
- 4.6M WORKING LENGTH









# LONG TAIL TAILGATE/BATTERY CHARGER COIL WITH 2POLE PLUGS

- 2 POLE BONDED CABLE
- 2 X 2 POLE PLUGS FITTED
- NOMINAL WIRE SIZES: 2 X 21MM2
- RED = POSITIVE; BLACK = NEGATIVE
- NOMINAL AMP RATING = 200A INTERMITTENT / 110A CONTINUOUS
- 1M LONG TAIL FOR EXTENDED REACH
- 5.2M WORKING LENGTH



# LONG TAIL TAILGATE/BATTERY CHARGER COIL (BARE ENDS)

- 2 X 21MM COPPER CROSS-SECTION COILS
- NOMINAL WIRE SIZES: 2 X 21MM2
- RED = POSITIVE; BLACK = NEGATIVE
- NOMINAL AMP RATING = 200A INTERMITTENT / 110A CONTINUOUS
- 2 X BARE ENDS (CUSTOMER CAN FIT OWN 2 POLE OR ANDERSON PLUGS)
- 1M LONG TAIL FOR EXTENDED REACH
- 5.2M WORKING LENGTH



# LONG TAIL BATTERY CHARGER COIL WITH GREY ANDERSON PLUGS FITTED (175AMP)

- 2 X 21MM COPPER CROSS-SECTION COILS
- NOMINAL WIRE SIZES: 2 X 21MM2
- RED = POSITIVE; BLACK = NEGATIVE
- NOMINAL AMP RATING = 200A INTERMITTENT/110A CONTINUOUS
- 2 X 175AMP GREY ORIGINAL ANDERSON PLUGS FITTED ON BOTH ENDS
- 1M LONG TAIL FOR EXTENDED REACH
- 5.2M WORKING LENGTH





#### PART# 100-124-8MM

# 2 CORE BATTERY CHARGING COIL (80-100AMP)



- NOMINAL WIRE SIZES: 2 X 8MM2
- NOMINAL AMP RATING = 80-100 AMPS
- RED = POSITIVE; BLACK = NEGATIVE
- 2 X BARE ENDS (CUSTOMER TO FIT OWN PLUGS/HARDWIRE)
- 1M LONG TAIL FOR EXTENDED REACH
- 4.6M WORKING LENGTH




#### PART# 100-124-6MM

# 2 CORE BATTERY CHARGING COIL (50-80AMP)



- NOMINAL WIRE SIZES: 2 X 6MM2
- NOMINAL AMP RATING = 50-80AMPS
- RED = POSITIVE; BLACK = NEGATIVE
- 2 X BARE ENDS (CUSTOMER TO FIT OWN PLUGS/HARDWIRE)
- 1M LONG TAIL FOR EXTENDED REACH
- 4.6M WORKING LENGTH





# 2 CORE MINI BATTERY CHARGING COIL (80-100AMP)

- 2CORE POLY-U CABLE
- NOMINAL WIRE SIZES: 2 X 8MM2
- NOMINAL AMP RATING = 80-100 AMPS
- RED = POSITIVE; BLACK = NEGATIVE
- 2 X BARE ENDS (CUSTOMER TO FIT OWN PLUGS/HARDWIRE)
- 2M WORKING LENGTH





#### PART# 100-124-6MM-MINI





- 2CORE POLY-U CABLE
- NOMINAL WIRE SIZES: 2 X 6MM2
- NOMINAL AMP RATING = 50-80 AMPS
- RED = POSITIVE; BLACK = NEGATIVE
- 2 X BARE ENDS (CUSTOMER TO FIT OWN PLUGS/HARDWIRE)
- 2M WORKING LENGTH



### 2 POLE PLUG

- 1 X POSITIVE POLE; 1 X NEGATIVE POLE
- HEAVY DUTY METAL BODY WITH SPRING GUARD
- NOMINAL AMP RATING = 200A MAX
- AVAILABLE IN SCREW TYPE OR CRIMP TYPE



# 2 POLE SOCKET

- 1 X POSITIVE POLE; 1 X NEGATIVE POLE
- HEAVY DUTY METAL BODY WITH POSITIVE LATCH
- NOMINAL AMP RATING = 200A MAX









#### U-CONNECT HIGH IMPACT TRAILER PLUG

- STANDARD 7PIN DIN PLUG
- HIGH QUALITY, NON-CONDUCTIVE PLASTIC RODY
- MATES WITH 600-102/600-10404"

#### **PART# 500-102M**



### **7PIN DIN METAL PLUG**



- HEAVY DUTY METAL BODY
- MATES WITH 600-102/600-104



# U-CONNECT HIGH IMPACT SAE/EURO PLUG



- MALE AND FEMALE
- SEALING AND NON-SEALING
- 1/2 INCH, 3/8 INCH OR 1/4 INCH
- CA93 CROSS REFERENCE AVAILABLE











- 7PIN SAE/EURO PLUG
- HEAVY DUTY METAL BODY
- MATES WITH 600-502M/600-502 LOOSENED OR SEPARATED





# SUPPLEMENTARY SAE/EURO PLUG PLASTIC (WHITE)

- SUPPLEMENTARY 7PIN PLUG WITH INVERTED EARTH
- ISO 3731 FOR AUXILIARY APPLICATIONS
- HIGH QUALITY, NON-CONDUCTIVE PLASTIC BODY
- MATES WITH 600-502SP/600-502SPM.

#### PART# 500-302SPM



# SUPPLEMENTARY SAE/EURO PLUG METAL (WHITE)

- SUPPLEMENTARY 7PIN PLUG WITH INVERTED EARTH
- ISO 3731 FOR AUXILIARY APPLICATIONS
- HEAVY DUTY METAL BODY
- MATES WITH 600-502SPM/600-502SP.







### 7PIN EBS PLUG (24 VOLT)



- FOR USE ON 24 VOLT APPLICATIONS
- CAN ALSO BE USED ON 5PIN APPLICATIONS
- SUPPLIED WITH SCREW TYPE CONTACTS.
   CRIMP TYPE AVAILABLE ON REQUEST
- MATES WITH 600-302



#### PART# 500-402V12

### 7PIN EBS PLUG (12 VOLT)



- FOR USE ON 12 VOLT APPLICATIONS
- CAN ALSO BE USED ON 5PIN APPLICATIONS
- SUPPLIED WITH SCREW TYPE CONTACTS. CRIMP TYPE AVAILABLE ON REQUEST
- MATES WITH 600-302V12



PART #500-412

### **7PIN EBS PLUG (MULTI-VOLT)**



- FOR USE ON COMBINATION 12 VOLT, 24 VOLT, OR MULTI-VOLT APPLICATIONS
- SUPPLIED WITH SCREW TYPE CONTACTS. CRIMP TYPE AVAILABLE ON REQUEST
- MATES WITH 600-302/600-302V12









# 15PIN PLUG



- SUPPLIED WITH SCREW TYPE CONTACTS. CRIMP TYPE AVAILABLE ON REQUEST
- MATES WITH 600-202





PART# 600-102



# U-CONNECT HIGH IMPACT TRAILER SOCKET

- STANDARD 7PIN DIN SOCKET
- HIGH QUALITY, NON-CONDUCTIVE PLASTIC RODY
- MATES WITH 500-102/500-102M





### **7PIN METAL SOCKET**

- STANDARD 7PIN DIN SOCKET
- HEAVY DUTY METAL BODY
- MATES WITH 500-102M/500-102

#### PART # 600-502



# SAE/EURO PLASTIC SOCKET

- 7PIN SAE/EURO SOCKET
- HIGH QUALITY, NON-CONDUCTIVE PLASTIC BODY
- MATES WITH 500-302/500-302M





### E/EURO METAL SOCKET

- 7PIN SAE/EURO SOCKET
- HEAVY DUTY METAL BODY
- MATES WITH 500-302M/500-302



# SUPPLEMENTARY SAE/EURO SOCKET PLASTIC (WHITE)

- SUPPLEMENTARY 7PIN SOCKET WITH INVERTED FARTH
- ISO 3731 FOR AUXILIARY APPLICATIONS
- HIGH QUALITY, NON-CONDUCTIVE PLASTIC BODY
   WITH DISTINCTIVE WHITE LID TO EASILY
   DIFFERENTIATE
- MATES WITH 500-302SP/500-302SPM





# SUPPLEMENTARY SAE/EURO SOCKET METAL

- SUPPLEMENTARY 7PIN SOCKET WITH INVERTED
  FARTH
- ISO 3731 FOR AUXILIARY APPLICATIONS
- HEAVY DUTY METAL BODY
- MATES WITH 500-302SPM/500-302SP





### 7PIN EBS SOCKET (24 VOLT)



- FOR USE ON 24 VOLT APPLICATIONS
- CAN ALSO BE USED ON 5PIN APPLICATIONS
- SUPPLIED WITH SCREW TYPE CONTACTS.
   CRIMP TYPE AVAILABLE ON REQUEST
- MATES WITH 500-402/500-412



PART# 600-302V12

### **7PIN EBS SOCKET (12 VOLT)**

- 7PIN SOCKET FOR EBS BRAKING SYSTEMS
- FOR USE ON 12 VOLT APPLICATIONS
- CAN ALSO BE USED ON 5PIN APPLICATIONS
- SUPPLIED WITH SCREW TYPE CONTACTS. CRIMP TYPE AVAILABLE ON REQUEST
- MATES WITH 500-402V12/500-412



PART# 600-301



### **EBS PARKING SOCKET**

- 7PIN UNIVERSAL PARKING SOCKET (NO CONNECTORS)
- ESSENTIAL TO WATERPROOF CABLES
- FOR SAFE STORAGE OF EBS CABLES WHEN NOT PLUGGED INTO TRAILER
- FOR USE ON 24VOLT OR 12VOLT APPLICATIONS
- CAN ALSO BE USED ON 5PIN ABS OR 15PIN POWER CABLES
- MATES WITH 500-402/500-402V12/500-412/500-202







PART# 600-202 15PIN SOCKET

- 15PIN SOCKET FOR LATEST GENERATION EUROPEAN VEHICLES AND SMART-TRAILERS
- AVAILABLE WITH SCREW TYPE CONTACTS.
   CRIMP TYPE AVAILABLE ON REQUEST

# **SECTION 7: SPECIALIST PRODUCTS**



#### PART# 500-103

# 7 PIN ALL MALE TRAILER PLUG



- 7PIN DIN PLUG WITH SPECIALISED ALL MALE PIN CONFIGURATION
- HIGH QUALITY, NON-CONDUCTIVE PLASTIC RODY
- MATES WITH 600-103

#### PART# 600-103

### 7 PIN ALL FEMALE TRAILER SOCKET



- STANDARD 7PIN DIN SOCKET WITH ALL FEMALE TUBE CONFIGURATION
- HIGH QUALITY, NON-CONDUCTIVE PLASTIC BODY
- MATES WITH 500-103

#### PART# 500-602

### 13 PIN PLUG



- 13PIN EUROPEAN 12V STANDARD PLUG
- NON-CONDUCTIVE PLASTIC BODY
- TWIST/LOCK CONNECTION
- MATES WITH 600-602



# **SECTION 7: SPECIALIST PRODUCTS**



#### PART# 600-602



### 13PIN SOCKET

- 13PIN EUROPEAN 12V SOCKET
- NON-CONDUCTIVE PLASTIC BODY
- TWIST/LOCK CONNECTION
- MATES WITH 500-602



# 13PIN TO 7PIN ADAPTER

- ADAPTS FRO 13PIN EURO STYLE FEMALE SOCKET TO 7PIN DIN SOCKET
- NON-CONDUCTIVE PLASTIC BODY
- TWIST/LOCK CONNECTION
- SUPPLIED WITH CORRECT FASTENERS
- COMPATIBLE WITH VW, MERCEDES, IVECO, JEEP ETC.



### **7PIN TO 13PIN ADAPTER)**

- ADAPTS FROM 7PIN DIN SOCKET TO 13PIN EURO STYLE FEMALE SOCKET
- NON-CONDUCTIVE PLASTIC BODY
- TWIST/LOCK CONNECTION
- SUPPLIED WITH CORRECT FASTENERS
- COMPATIBLE WITH VW, MERCEDES, IVECO, JEEP ETC.



# **SECTION 7: SPECIALIST PRODUCTS**





### 13PIN SOCKET

- AVAILABLE ON REQUEST
- ALSO AVAILABLE WITH FEMALE TUBES (PART# 500-12T)
- MATES WITH 600-12P



# 12PIN MILITARY SPEC SOCKET WITH FEMALE TUBES

- AVAILABLE ON REQUEST
- ALSO AVAILABLE WITH FEMALE TUBES (PART# 600-12P)
- MATES WITH 500-12T



#### PART# 700-102





STAINLESS STEEL SPRING CATCH

**UNIVERSAL CATCH ASSEMBLY** 

- PROVIDES LOCK-IN OF 7PIN DIN CONNECTORS
- **EASY INSTALLATION**
- FITS BEHIND EXISTING SOCKET (NO NEED TO **DISCONNECT WIRES)**
- REGISTERED DESIGN

#### **PART# 600-1RB**





- **INGRESS INTO BACK OF SOCKET**
- **KEEP WIRING SAFE FROM DETERIORATION AND** RUSTING
- FITS BEHIND ANY DIN SOCKET
- **CUSTOMISABLE TO YOUR CABLE SIZE. SIMPLY CUT TIERS OF RUBBER TO FIT**

#### PART# 900-102

# **SUZI SUSPENSION SPRING**



- ASSISTS ON LOW MOUNTING LOCATIONS
- SUPPORTS COILS TO STAY CLEAR OF CHASSIS AND
- ACCOMMODATES AIR, ELECTRICAL AND EBS COILS
- EASY TO INSTALL





#### PART# 900-104

#### **4 HOLE CLAMP**



- FOR SAFE AND EASY SUSPENSION OF COILS ON POGO STICK OR SPRING BEHIND CAB
- SUPPORTS COILS TO STAY CLEAR OF CHASSIS AND PROPSHAFT
- **ACCOMMODATES UP TO 4 CABLES (E.G. RED** AIR, BLUE AIR, ELECTRICAL AND EBS)
- NO SCREWS, NO INSTALL, EASY-TO-USE **CLAMP SYSTEM**
- COATED CARABINER CLIP FOR SIMPLE AND **SWIFT USE**



### **BRACKET ASSEMBLY**



- 2 PART ASSEMBLY FOR EASY INSTALLATION
- ADJUSTABLE ANGLE TO PROTECT SUZI COILS **AND HOSES**
- MODULAR SYSTEM WITH ADD-ON AND ADAPTER **PLATES**
- ALLOWS FOR EXTRA CONNECTORS AND CUSTOM **CONFIGURATIONS**

#### PART# KPN-LOC

### **KINGPIN LOCK**



- THEFT DETERRENT
- PREVENTS UNAUTHORIZED HOOKING OF TRAILERS
- **ESSENTIAL TO WATERPROOF CABLES**
- FOR SAFE STORAGE OF EBS CABLES WHEN NOT PLUGGED INTO TRAILER
- UNIQUE LOCK & KEY COMBO





#### PART# INS-TES





- TESTER WIRED TO AUSTRALIAN STANDARD
- 10M LENGTH ALLOWS FOR ONE PERSON TESTING
- LED LIGHTS IN TEST UNIT TO INDICATE CORRECT FUNCTIONS



#### PART# INS-SOC

### TRAIL-LINK SOCKET TESTER



- TESTS 7PIN DIN OUTPUT ON ANY TOWING VEHICLE TO ISOLATE FAULTS
- TESTER WIRED TO AUSTRALIAN STANDARD
- LED LIGHTS IN TEST UNIT TO INDICATE CORRECT FUNCTIONS

#### PART# BUP-ALM

# **BACKUP ALARM**



- 12V-80V
- HIGH DECIBEL OUTPUT
- FOR USE IN SAFETY WARNING SYSTEMS E.G. REVERSE BUZZER









### **SECTION 9: KITS AND NEW CONCEPTS**



#### PART# 300-TCK-LT

#### TRAILER CONNECTION KIT - LONG TAIL



- KIT INCLUDES:
  - LONG TAIL AIR COIL PAIR (RED AND BLUE)
  - AIR COILS FITTED WITH 1/2" TAPS (FEMALE) ON TRUCK END AND NON-SEALING ADAPTOR AND COUPLER ON TRAILER END
  - LONG TAIL ELECTRICAL LEAD (EITHER 100-505 OR 100-503)



#### TRAILER CONNECTION KIT - SHORT TAIL



- THIS KIT HAS ALL ESSENTIAL ITEMS FOR A NEW TRUCK OR TRAILER SET UP, OR GREAT FOR SWAPPING OUT ALL DAMAGED OR WORN OUT COILS
- KIT INCLUDES:
- SHORT TAIL AIR COIL PAIR (RED AND BLUE)
  - AIR COILS FITTED WITH 1/2" TAPS (FEMALE) AND NON-SEALING ADAPTOR AND COUPLER ON TRAILER FND
  - SHORT TAIL ELECTRICAL LEAD (EITHER 100-205 OR 100-203)
  - SHORT TAIL EBS LEAD (MULTIVOLT)

#### PART# 300-DCK

#### DOG TRAILER CONNECTION KIT



- THE DOG TRAILER CONNECTING KIT COMPRISES ALL THE
- BEST MATERIALS OF THE COILED KITS, BUT FEATURES
- STRAIGHT CABLES AND TUBES FOR DOG OR A-FRAME -
- TRAILER HITCHING.
- THE KIT COMES IN 3 LENGTHS: 1.2M, 3M OR 6M, AND CAN
- BE CUSTOMISED TO YOUR SPECIFIC REQUIREMENTS
- THE KIT INCLUDES:
- STRAIGHT ELECTRICAL CABLE WITH MOULDED PLUGS
- STRAIGHT EBS CABLE WITH MULTIVOLT EBS PLUGS
- RED AND BLUE STRAIGHT HI-PERFORMANCE PU AIR TUBE
- WITH 1/2" (OR 1/4" FITTINGS)
- OPTIONAL SECOND ELECTRICAL LEAD AND YELLOW -
- AND/OR BLACK AUXILIARY AIR TUBES WITH 1/2" OR -
- 1/4" FITTINGS





# WWW.SUPREMETRUCK.CO.NZ INFO@SUPREMETRUCK.CO.NZ 027 208 8829

